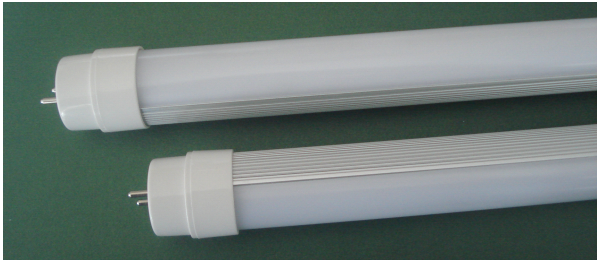
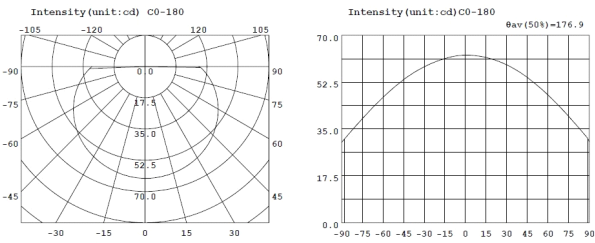
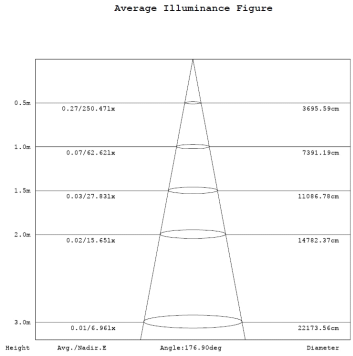
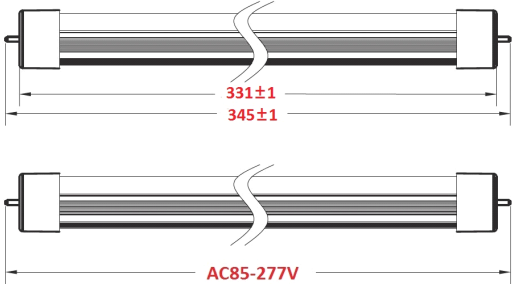


# Specification

Product Name		Fluorescent lamp			Image	
Model No.		BM-T8A035-5W				
Optical characteristic	LED source	Epistar			Photometric data	
	LED type	SMD3528				
	CCT	6000-6500K				
	LED quantity	72PCS				
	Cover Type	Transparent	Striped	Frosted		
	Luminous efficiency	92LM/W	90LM/W	85LM/W		
	Luminous Flux	460LM	450LM	340LM		
	CRI	Ra ≥ 75				
	Beam angle	≥ 120°				
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.02A-0.06A			LUX	
	Frequency	50-60Hz				
	Output voltage	36-42v				
	Output current	100ma ± 3%				
	Power	5W				
	LED Power	4W				
	Power efficiency	≥ 85%				
	Power factor	>0.9				
Dimmable	Optional					
Other characteristic	Surface temperature	45°C (environment temperature 31°C)			Structure	
	Operating temperature	-35°C -- +55°C				
	Installing method	Insert and screw				
	Work humidity	5%-95%RH				
	Storage temperature	-40°C -- +65°C				
	Equivalent halogen bulb	10W				
	IP rate	IP64				
	LED lifespan	>40000h				
	Casing material	AL				
	Weight	140g				
	Size	Φ 26*331mm				
	Socket	G13 Rotary lamp 180°				
	Box size	1pcs/box 36×36×360mm				
Carton size	25pcs/carton 360×210×200mm					