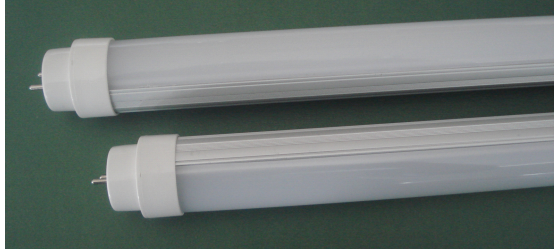
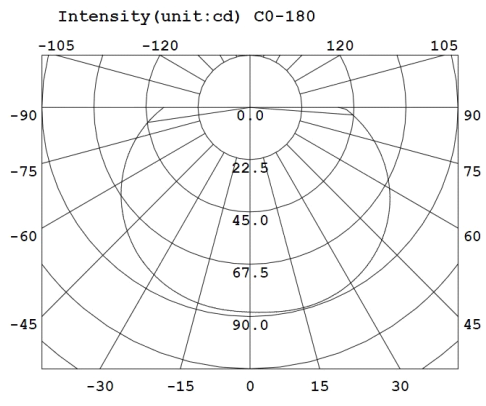
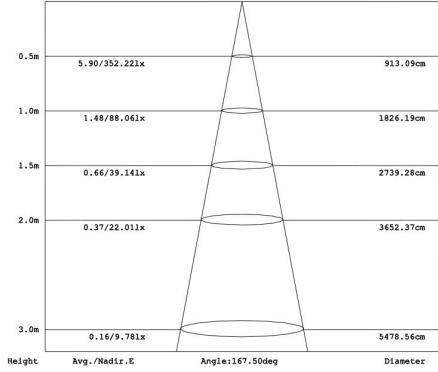
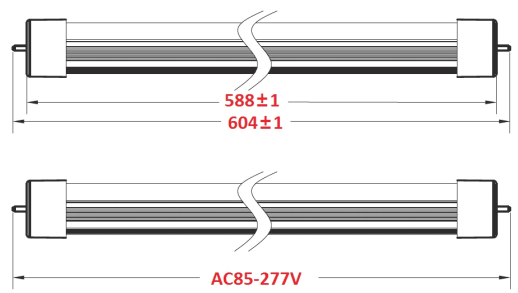


Specification

Product Name		Fluorescent lamp			Image	
Model No.		BM-T8A060-9W				
Optical characteristic	LED source	Epistar			Photometric data	
	LED type	SMD3528				
	CCT	6000-6500K				
	LED quantity	144PCS				
	Cover Type	Transparent	Striped	Frosted		
	Luminous efficiency	92LM/W	90LM/W	85LM/W		
	Luminous Flux	925LM	900LM	875LM		
	CRI	Ra ≥ 75				
Beam angle	≥ 120°					
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.036A-0.118A			LUX	
	Frequency	50-60Hz				
	Output voltage	36-42v				
	Output current	216ma ± 3%				
	Power	9.65W				
	LED Power	8.3W				
	Power efficiency	≥ 85%				
	Power factor	>0.9				
Dimmable	Optional					
Other characteristic	Surface temperature	45°C (environment temperature 31°C)			Structure	
	Operating temperature	-35°C -- +55°C				
	Installing method	Insert and screw				
	Work humidity	5%-95%RH				
	Storage temperature	-40°C -- +65°C				
	Equivalent halogen bulb	20W				
	IP rate	IP64				
	LED lifespan	>40000h				
	Casing material	AL				
	Weight	230g				
	Size	Φ 26*588mm				
	Socket	G13 Rotary lamp 180°				
	Box size	1pcs/box 36×36×620mm				
Carton size	25pcs/carton 660×210×200mm					