
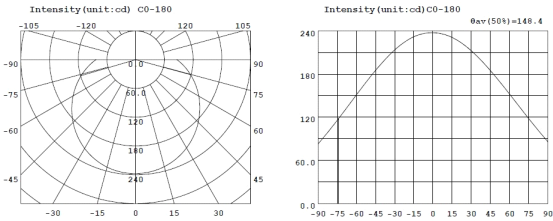
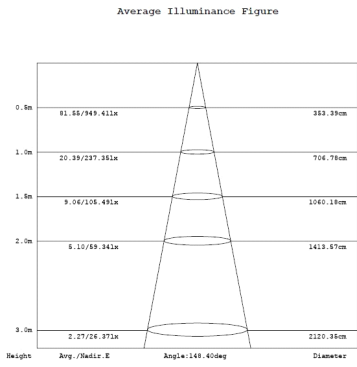
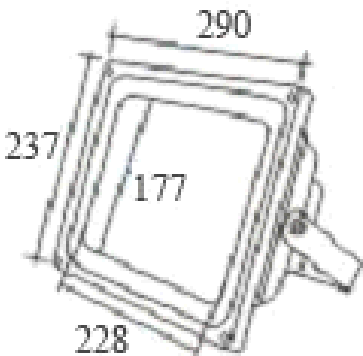


# Specification

Product Name		<b>LED Flood Light</b>		Image	
Model No.		<b>BM-TGD-50W</b>			
Optical characteristic	LED source	Bridgelux		Photometric data	
	LED type	50W Integrated light source			
	CCT	2700-6500K			
	LED quantity	1PCS			
	Cover Type	Glass			
	Luminous efficiency	90LM/W			
	Luminous Flux	4500LM			
	CRI	Ra ≥ 75			
Beam angle	120°				
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.222A-0.602A		LUX	
	Frequency	50-60Hz			
	Output voltage	27-36V			
	Output current	1500ma ± 3%			
	Power	56W			
	LED Power	50W			
	Power efficiency	≥ 85%			
	Power factor	>0.95			
Dimmable	NO				
Other characteristic	Surface temperature	55°C (environment temperature 31°C)		Structure	
	Operating temperature	-35°C -- +55°C			
	Installing method	Screw fixation			
	Work humidity	5%-95%RH			
	Storage temperature	-40°C -- +65°C			
	Equivalent halogen bulb	100W			
	IP rate	IP65			
	LED lifespan	>40000h			
	Casing material	AL			
	Weight	4kg			
	Size	L237*W228*290mm			
	Socket	-----			
Box size	1pcs/box 245×235×300mm				
Carton size	8pcs/carton 490×470×600mm				