
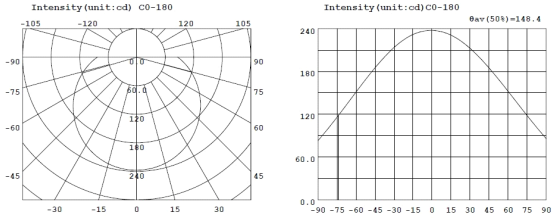
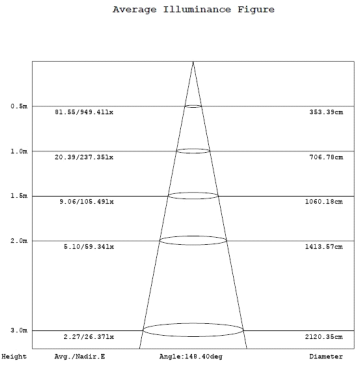
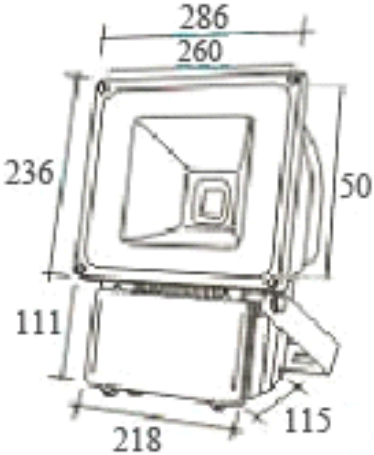


Specification

Product Name		LED Flood Light		Image	
Model No.		BM-TGD-80W			
Optical characteristic	LED source	Bridgelux		Photometric data	
	LED type	70W Integrated light source			
	CCT	2700-6500K			
	LED quantity	1PCS			
	Cover Type	Glass			
	Luminous efficiency	90LM/W			
	Luminous Flux	6500LM			
	CRI	Ra ≥ 75			
Beam angle	120°				
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.332A-0.932A		LUX	
	Frequency	50-60Hz			
	Output voltage	27-36V			
	Output current	2100ma ± 3%			
	Power	80W			
	LED Power	70W			
	Power efficiency	≥ 85%			
	Power factor	> 0.95			
Dimmable	NO				
Other characteristic	Surface temperature	55°C (environment temperature 31°C)		Structure	
	Operating temperature	-35°C -- +55°C			
	Installing method	Screw fixation			
	Work humidity	5%-95%RH			
	Storage temperature	-40°C -- +65°C			
	Equivalent halogen bulb	150W			
	IP rate	IP65			
	LED lifespan	> 40000h			
	Casing material	AL			
	Weight	6.5kg			
	Size	L347*W286*H115mm			
	Socket	-----			
	Box size	1pcs/box 350×295×300mm			
Carton size	2pcs/carton 350×295×600mm				