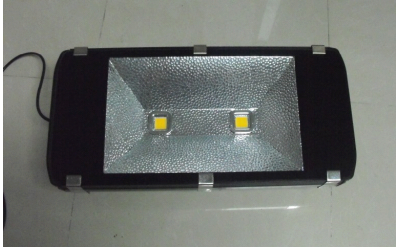
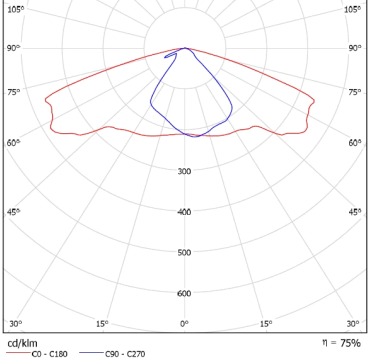
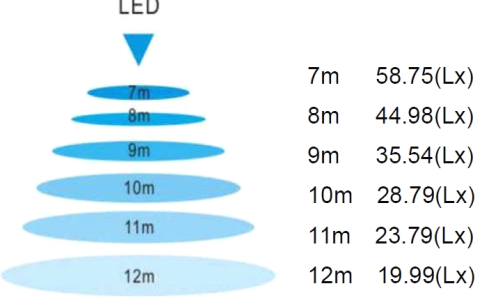
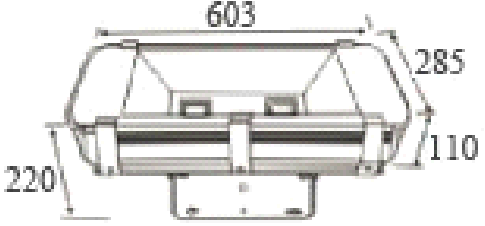


Specification

Product Name		LED Flood Light	Image													
Model No.		BM-TGD-120WA														
Optical characteristic	LED source	Bridgelux	Photometric data													
	LED type	50W Integrated light source														
	CCT	2700-6500K														
	LED quantity	2PCS														
	Cover Type	Glass														
	Luminous efficiency	90LM/W														
	Luminous Flux	10000LM														
	CRI	Ra ≥ 75														
Beam angle	60°															
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.43A-1.4A	LUX	 <table border="1"> <tr><td>7m</td><td>58.75(Lx)</td></tr> <tr><td>8m</td><td>44.98(Lx)</td></tr> <tr><td>9m</td><td>35.54(Lx)</td></tr> <tr><td>10m</td><td>28.79(Lx)</td></tr> <tr><td>11m</td><td>23.79(Lx)</td></tr> <tr><td>12m</td><td>19.99(Lx)</td></tr> </table>	7m	58.75(Lx)	8m	44.98(Lx)	9m	35.54(Lx)	10m	28.79(Lx)	11m	23.79(Lx)	12m	19.99(Lx)
	7m	58.75(Lx)														
	8m	44.98(Lx)														
	9m	35.54(Lx)														
	10m	28.79(Lx)														
	11m	23.79(Lx)														
	12m	19.99(Lx)														
	Frequency	50-60Hz														
Output voltage	28-36v															
Output current	3A ± 3%															
Power	120W															
LED Power	100W															
Power efficiency	≥ 85%															
Power factor	> 0.95															
Dimmable	NO															
Other characteristic	Surface temperature	55°C (environment temperature 31°C)	Structure													
	Operating temperature	-35°C -- +55°C														
	Installing method	Screw fixation														
	Work humidity	5%-95%RH														
	Storage temperature	-40°C -- +65°C														
	Equivalent halogen bulb	250W														
	IP rate	IP65														
	LED lifespan	> 40000h														
	Casing material	AL														
	Weight	13.5kg														
	Size	L600*285*215mm														
	Socket	-----														
	Box size	1pcs/box 600×350×300mm														
Carton size	2pcs/carton 600×600×385mm															