
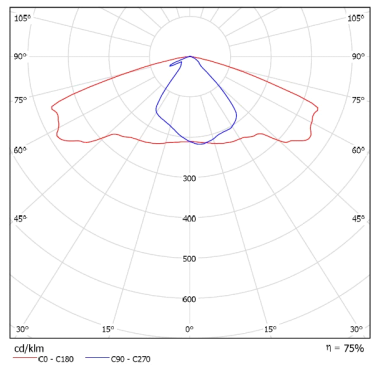
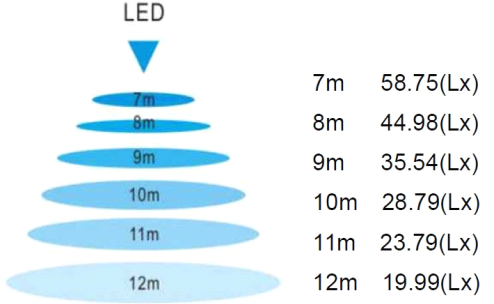
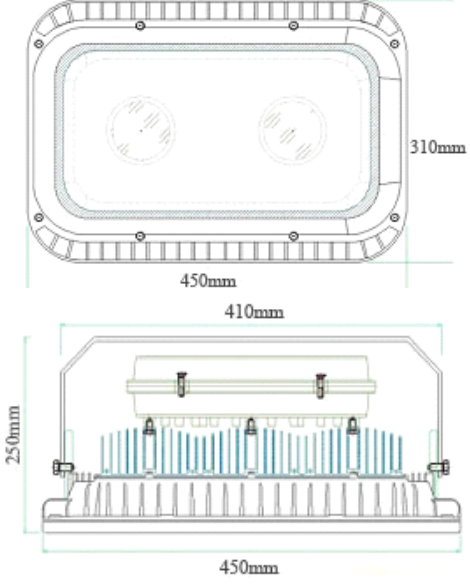


Specification

Product Name		LED Flood Light	Image	
Model No.		BM-TGD-120WB		
Optical characteristic	LED source	Bridgelux	Photometric data	
	LED type	50W Integrated light source		
	CCT	2700-6500K		
	LED quantity	2PCS		
	Cover Type	Glass		
	Luminous efficiency	90LM/W		
	Luminous Flux	10000LM		
	CRI	Ra ≥ 75		
Beam angle	60°			
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.43A-1.4A	LUX	
	Frequency	50-60Hz		
	Output voltage	28-36v		
	Output current	3A ± 3%		
	Power	120W		
	LED Power	100W		
	Power efficiency	≥ 85%		
	Power factor	>0.95		
Dimmable	NO			
Other characteristic	Surface temperature	55°C (environment temperature 31°C)	Structure	
	Operating temperature	-35°C -- +55°C		
	Installing method	Screw fixation		
	Work humidity	5%-95%RH		
	Storage temperature	-40°C -- +65°C		
	Equivalent halogen bulb	250W		
	IP rate	IP65		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	10kg		
	Size	L450*310*250 mm		
	Socket	-----		
	Box size	1pcs/box 500×350×300mm		
Carton size	2pcs/carton 500×500×385mm			