
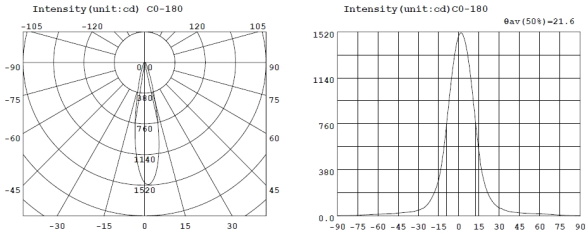
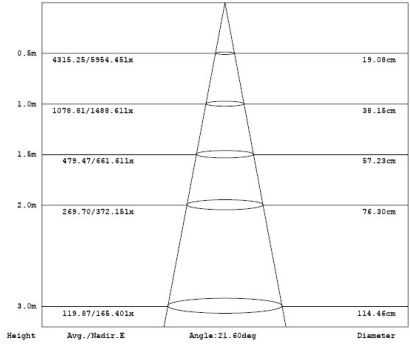
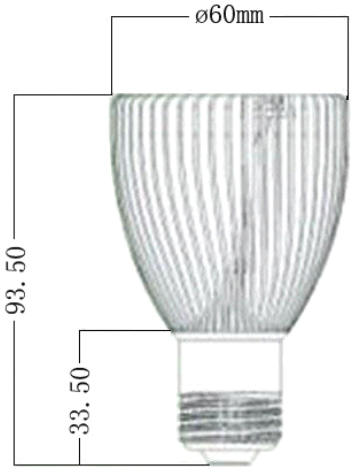


Specification

Product Name		LED Spotlight	Image	
Model No.		BM-SLEDP20-A		
Optical characteristic	LED source	Bridgelux	Photometric data	
	LED type	1W High power		
	CCT	6000-6500K		
	LED quantity	5PCS		
	Cover Type	PMMA		
	Luminous efficiency	90LM/W		
	Luminous Flux	>450LM		
	CRI	Ra ≥ 75		
	Beam angle	30° 60°		
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.042A-0.145A	LUX	
	Frequency	50-60Hz		
	Output voltage	36-42v		
	Output current	300ma ± 3%		
	Power	6.2W		
	LED Power	5W		
	Power efficacy	≥ 85%		
	Power factor	>0.7		
	Dimmable	Optional		
Other characteristic	Surface temperature	55°C (environment temperature 31°C)	Structure	
	Operating temperature	-35°C -- +55°C		
	Installing method	Screw		
	Work humidity	5%-95%RH		
	Storage temperature	-40°C -- +65°C		
	Equivalent Incandescent lamp	10W		
	IP rate	IP64		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	150g		
	Size	Φ 62*94mm		
	Socket	E11 E14 E17 E26 E27 GU10		
	Box size	1pcs/box 68×68×100mm		
	Carton size	100pcs/carton 350×350×410mm		