
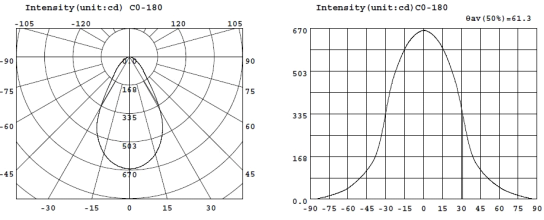
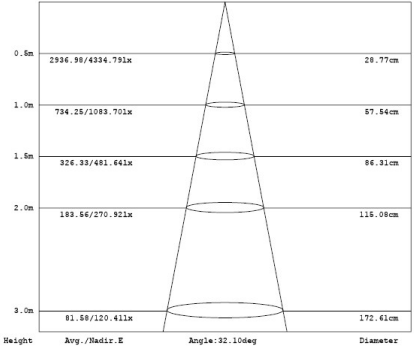
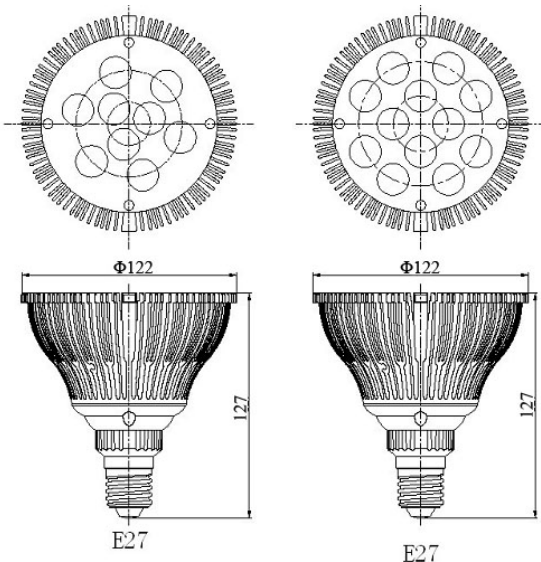


# Specification

<b>Product Name</b>		<b>LED Spotlight</b>	<b>Image</b>	
<b>Model No.</b>		<b>BM-12LEDP38-A</b>		
<b>Optical characteristic</b>	LED source	Bridgelux	<b>Photometric data</b>	
	LED type	1W High power		
	CCT	6000-6500K		
	LED quantity	12PCS		
	Cover Type	PMMA		
	Luminous efficiency	90LM/W		
	Luminous Flux	>1150LM		
	CRI	Ra ≥ 75		
Beam angle	30° 60°			
<b>Electricity characteristic</b>	Input voltage/Current	AC85V-277V/ 0.056A-0.165A	<b>LUX</b>	
	Frequency	50-60Hz		
	Output voltage	36-42V		
	Output current	300ma ± 3%		
	Power	14W		
	LED Power	12W		
	Power efficiency	≥ 85%		
	Power factor	> 0.9		
Dimmable	Optional			
<b>Other characteristic</b>	Surface temperature	55°C (environment temperature 31°C)	<b>Structure</b>	
	Operating temperature	-35°C -- +55°C		
	Installing method	Screw		
	Work humidity	5%-95%RH		
	Storage temperature	-40°C -- +65°C		
	Equivalent Incandescent lamp	120W		
	IP rate	IP64		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	495g		
	Size	Φ 122*132mm		
	Socket	E26 E27		
	Box size	1pcs/box 125×125×135mm		
Carton size	30pcs/carton 630×260×410mm			