
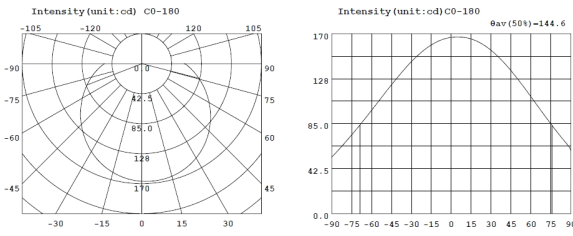
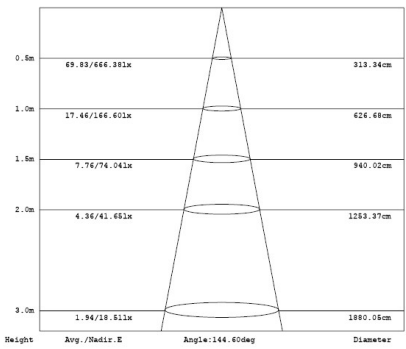
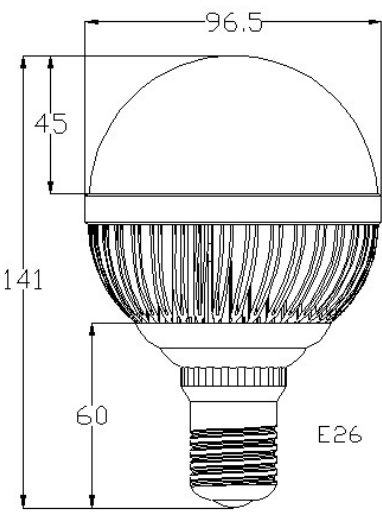


Specification

| | | | | |
|-----------------------------------|------------------------------|-------------------------------------|-------------------------|---|
| Product Name | | LED Bulb | Image |  |
| Model No. | | BM-95A-9W | | |
| Optical characteristic | LED source | Bridgelux | Photometric data |  |
| | LED type | 1W High power | | |
| | CCT | 6000-6500K | | |
| | LED quantity | 9PCS | | |
| | Cover Type | PC | | |
| | Luminous efficiency | 90LM/W | | |
| | Luminous Flux | >850LM | | |
| | CRI | Ra ≥ 75 | | |
| | Beam angle | 180° | | |
| Electricity characteristic | Input voltage/Current | AC85V-277V/ 0.042A-0.122A | LUX |  |
| | Frequency | 50-60Hz | | |
| | Output voltage | 27-36V | | |
| | Output current | 300ma ± 3% | | |
| | Power | 10.4W | | |
| | LED Power | 9W | | |
| | Power efficiency | ≥ 85% | | |
| | Power factor | >0.9 | | |
| Dimmable | Optional | | | |
| Other characteristic | Surface temperature | 55°C (environment temperature 31°C) | Structure |  |
| | Operating temperature | -35°C -- +55°C | | |
| | Installing method | Screw | | |
| | Work humidity | 5%-95%RH | | |
| | Storage temperature | -40°C -- +65°C | | |
| | Equivalent Incandescent lamp | 85W | | |
| | IP rate | IP64 | | |
| | LED lifespan | >40000h | | |
| | Casing material | AL | | |
| | Weight | 300g | | |
| | Size | Φ 96.5*141mm | | |
| | Socket | E26 E27 | | |
| | Box size | 1pcs/box 100×100×145mm | | |
| Carton size | 50pcs/carton 510×510×295mm | | | |