
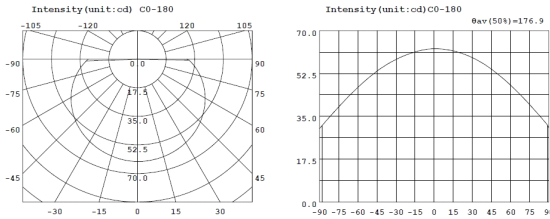
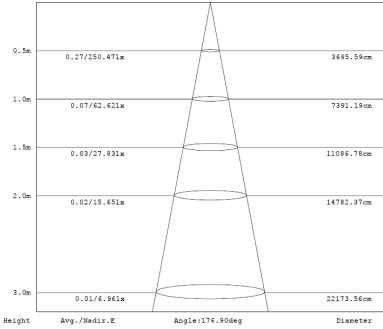
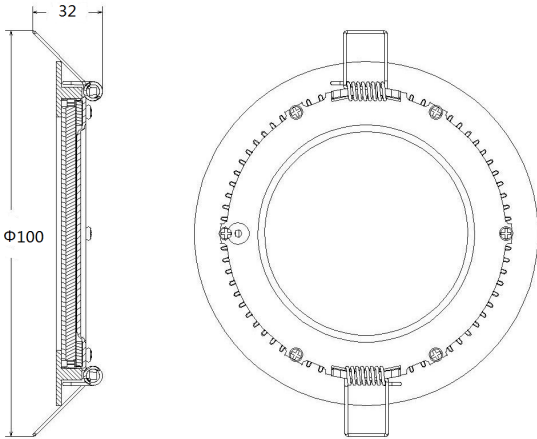


Specification

Product Name		LED Panel Light	Image	
Model No.		BM-RPL100-5W		
Optical characteristic	LED source	Epistar	Photometric data	
	LED type	SMD3528		
	CCT	6000-6500K		
	LED quantity	69PCS		
	Cover Type	PMMA		
	Luminous efficiency	80LM/W		
	Luminous Flux	400LM		
	CRI	Ra ≥ 75		
Beam angle	≥ 120°			
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.02A-0.06A	LUX	<p>Average Illuminance Figure</p> 
	Frequency	50-60Hz		
	Output voltage	9-12V		
	Output current	400ma ± 3%		
	Power	5W		
	LED Power	4W		
	Power efficiency	≥ 85%		
	Power factor	>0.9		
Dimmable	Can choose TRIAC			
Other characteristic	Surface temperature	45℃	Structure	
	Operating temperature	-20℃ -- +40℃		
	Installing method	Embedded, Ceiling and Suspended ceiling		
	Work humidity	5%-95%RH		
	Storage temperature	-30℃ -- +65℃		
	Equivalent halogen bulb	10W		
	IP rate	IP64		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	250g		
	Size	Φ 100* Φ 95*H32mm		
	Opening Size	Φ 97mm		
	Box size	1pcs/box 305×85×305 mm		
Carton size	5pcs/carton 315×335×315mm			