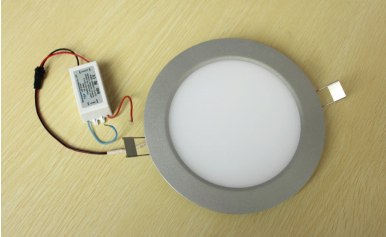
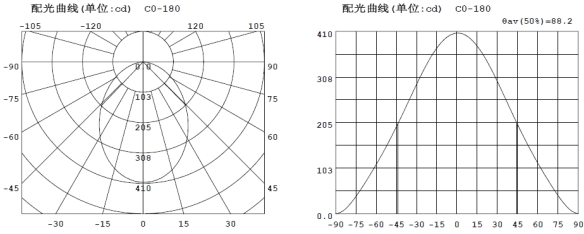
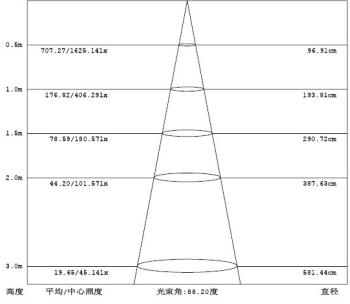
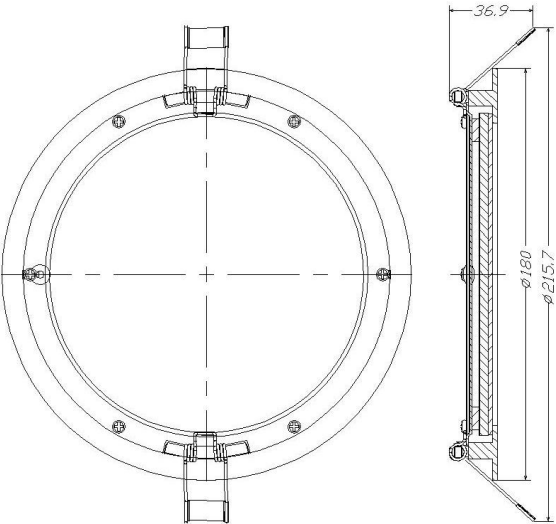


Specification

Product Name		LED Panel Light		Image	
Model No.		BM-RPL215-10W			
Optical characteristic	LED source	Epistar		Photometric data	
	LED type	SMD3528			
	CCT	6000-6500K			
	LED quantity	138PCS			
	Cover Type	PMMA			
	Luminous efficiency	80LM/W			
	Luminous Flux	800LM			
	CRI	Ra ≥ 75			
	Beam angle	≥ 120°			
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.036A-0.118A		LUX	
	Frequency	50-60Hz			
	Output voltage	24-32V			
	Output current	400ma ± 3%			
	Power	10W			
	LED Power	8.5W			
	Power efficiency	≥ 85%			
	Power factor	>0.9			
Dimmable	Can choose TRIAC				
Other characteristic	Surface temperature	45°C		Structure	
	Operating temperature	-20°C -- +40°C			
	Installing method	Embedded, Ceiling and Suspended ceiling			
	Work humidity	5%-95%RH			
	Storage temperature	-30°C -- +65°C			
	Equivalent halogen bulb	20W			
	IP rate	IP64			
	LED lifespan	>40000h			
	Casing material	AL			
	Weight	350g			
	Size	φ 215* φ 200*H25mm			
	Opening Size	Φ 208mm			
	Box size	1pcs/box 270×270×55 mm			
	Carton size	20pcs/carton 555×555×305mm			