
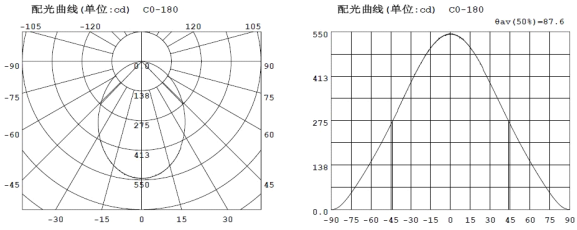
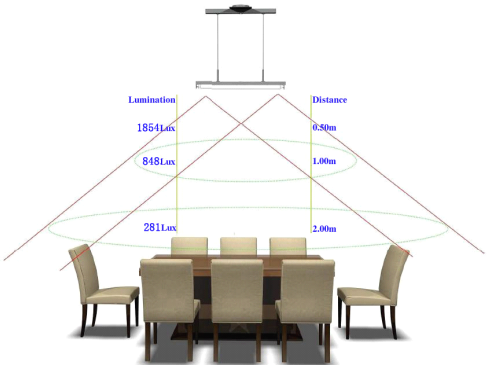
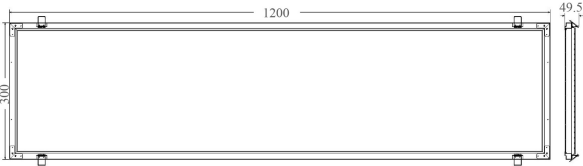


Specification

Product Name		LED Panel Light	Image	
Model No.		BM-SPL30120-65W		
Optical characteristic	LED source	Epistar	Photometric data	
	LED type	SMD3528		
	CCT	6000-6500K		
	LED quantity	900PCS		
	Cover Type	PMMA		
	Luminous efficiency	80LM/W		
	Luminous Flux	5250LM		
	CRI	Ra ≥ 75		
	Beam angle	≥ 120°		
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.237A-0.765A	LUX	
	Frequency	50-60Hz		
	Output voltage	45-60v		
	Output current	1080ma ± 3%		
	Power	65W		
	LED Power	55.6W		
	Power efficiency	≥ 85%		
	Power factor	>0.9		
	Dimmable	Can choose TRIAC		
Other characteristic	Surface temperature	45°C	Structure	
	Operating temperature	-20°C -- +40°C		
	Installing method	Embedded, Ceiling and Suspended ceiling		
	Work humidity	5%-95%RH		
	Storage temperature	-30°C -- +65°C		
	Equivalent halogen bulb	120W		
	IP rate	IP64		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	2000g		
	Size	L300*W1200*H50mm		
	Power supply arrangement	External		
	Box size	1pcs/box 345×85×1300 mm		
	Carton size	2pcs/carton 360×185×1325mm		