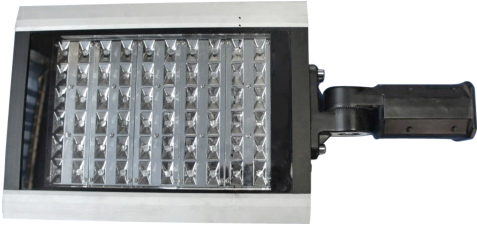
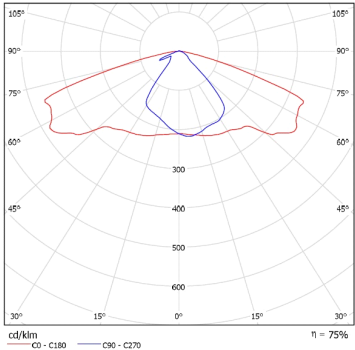
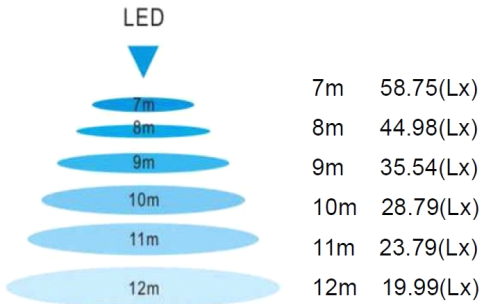
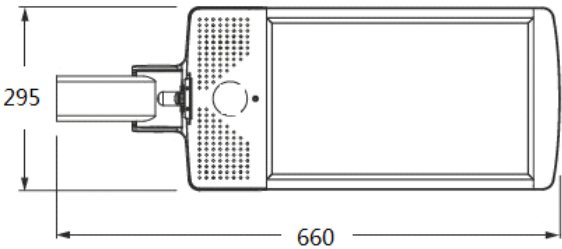


# Specification

<b>Product Name</b>		<b>LED Street Light</b>	<b>Image</b>													
<b>Model No.</b>		<b>BM-SL120A-130W</b>														
<b>Optical characteristic</b>	LED source	Bridgelux	<b>Photometric data</b>													
	LED type	1W High Power														
	CCT	2700-6500K														
	LED quantity	120PCS														
	Cover Type	PMMA														
	Luminous efficiency	90LM/W														
	Luminous Flux	11000LM														
	CRI	Ra ≥ 75														
Beam angle	60°															
<b>Electricity characteristic</b>	Input voltage/Current	AC85V-277V/ 0.47A-1.53A	<b>LUX</b>	 <p>LED</p> <table border="1"> <tr><td>7m</td><td>58.75(Lx)</td></tr> <tr><td>8m</td><td>44.98(Lx)</td></tr> <tr><td>9m</td><td>35.54(Lx)</td></tr> <tr><td>10m</td><td>28.79(Lx)</td></tr> <tr><td>11m</td><td>23.79(Lx)</td></tr> <tr><td>12m</td><td>19.99(Lx)</td></tr> </table>	7m	58.75(Lx)	8m	44.98(Lx)	9m	35.54(Lx)	10m	28.79(Lx)	11m	23.79(Lx)	12m	19.99(Lx)
	7m	58.75(Lx)														
	8m	44.98(Lx)														
	9m	35.54(Lx)														
	10m	28.79(Lx)														
	11m	23.79(Lx)														
	12m	19.99(Lx)														
	Frequency	50-60Hz														
Output voltage	30-40V															
Output current	3.6A ± 3%															
Power	130W															
LED Power	120W															
Power efficiency	≥ 85%															
Power factor	>0.95															
Dimmable	NO															
<b>Other characteristic</b>	Surface temperature	55°C (environment temperature 31°C)	<b>Structure</b>													
	Operating temperature	-35°C -- +55°C														
	Installing method	Screw fixation														
	Work humidity	5%-95%RH														
	Storage temperature	-40°C -- +65°C														
	Equivalent halogen bulb	250W														
	IP rate	IP65														
	LED lifespan	>40000h														
	Casing material	AL														
	Weight	9kg														
	Size	L660*295*55 mm														
	Pole Height	8-10M														
Pole Spacing	20-30M															
Box size	1pcs/box 670×305×65mm															