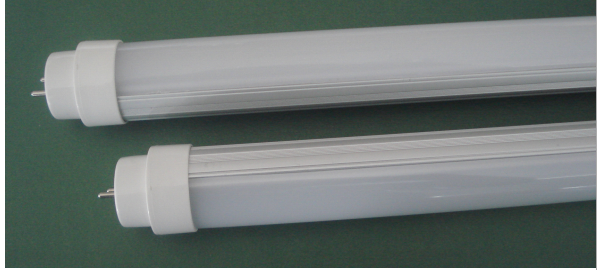
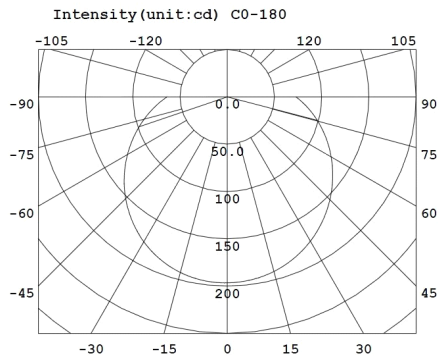
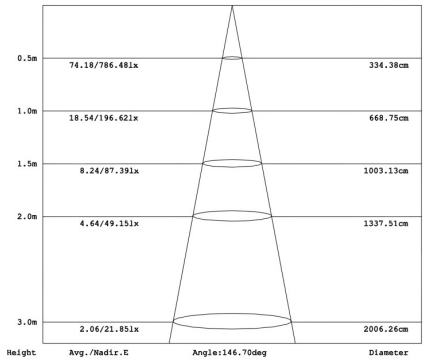
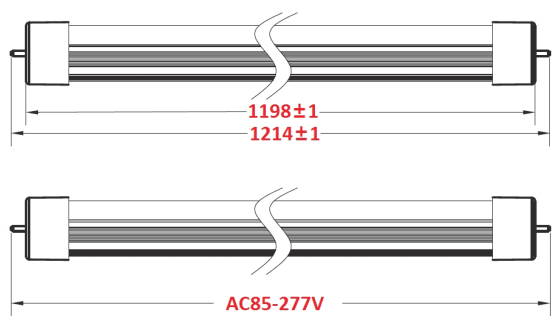


Specification

Product Name		Fluorescent lamp			Image	
Model No.		BM-T10A120-20W				
Optical characteristic	LED source	Epistar			Photometric data	
	LED type	SMD3528				
	CCT	6000-6500K				
	LED quantity	288PCS				
	Cover Type	Transparent	Striped	Frosted		
	Luminous efficiency	92LM/W	90LM/W	85LM/W		
	Luminous Flux	1850LM	1800LM	1750LM		
	CRI	Ra ≥ 75				
	Beam angle	≥ 120°				
Electricity characteristic	Input voltage/Current	AC85V-277V/0.08A-0.261A			LUX	
	Frequency	50-60Hz				
	Output voltage	36-42v				
	Output current	430ma ± 3%				
	Power	19.3W				
	LED Power	16.6W				
	Power efficiency	≥ 85%				
	Power factor	>0.9				
	Dimmable	Optional				
Other characteristic	Surface temperature	45°C (environment temperature 31°C)			Structure	
	Operating temperature	-35°C -- +55°C				
	Installing method	Insert and screw				
	Work humidity	5%-95%RH				
	Storage temperature	-40°C -- +65°C				
	Equivalent halogen bulb	40W				
	IP rate	IP64				
	LED lifespan	>40000h				
	Casing material	AL				
	Weight	400g				
	Size	Φ 30*1198mm				
	Socket	G13 Rotary lamp 180°				
	Box size	1pcs/box 36×36×1220mm				
Carton size	25pcs/carton 1260×230×220mm					