
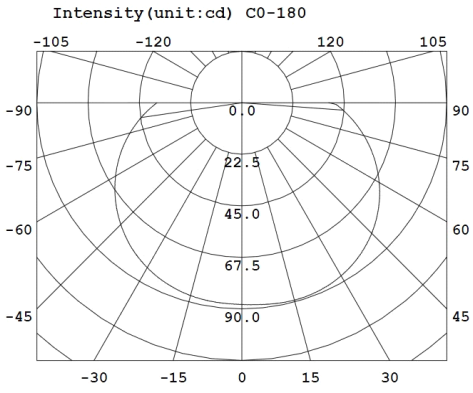
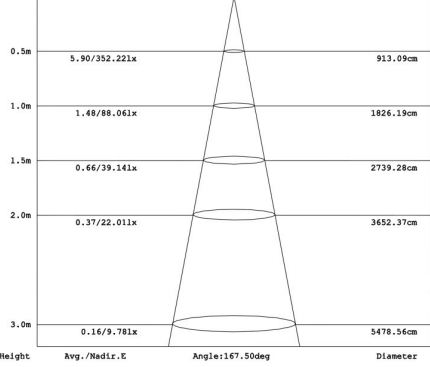
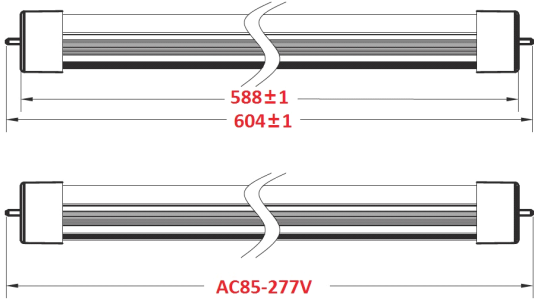


Specification

| | | | | | | |
|-----------------------------------|----------------------------|-------------------------------------|---------|---------|-------------------------|---|
| Product Name | | Fluorescent lamp | | | Image |  |
| Model No. | | BM-T10A060-9W | | | | |
| Optical characteristic | LED source | Epistar | | | Photometric data |  |
| | LED type | SMD3528 | | | | |
| | CCT | 6000-6500K | | | | |
| | LED quantity | 144PCS | | | | |
| | Cover Type | Transparent | Striped | Frosted | | |
| | Luminous efficiency | 92LM/W | 90LM/W | 85LM/W | | |
| | Luminous Flux | 925LM | 900LM | 875LM | | |
| | CRI | Ra ≥ 75 | | | | |
| Beam angle | ≥ 120° | | | | | |
| Electricity characteristic | Input voltage/Current | AC85V-277V/ 0.036A-0.118A | | | LUX |  |
| | Frequency | 50-60Hz | | | | |
| | Output voltage | 36-42v | | | | |
| | Output current | 216ma ± 3% | | | | |
| | Power | 9.65W | | | | |
| | LED Power | 8.3W | | | | |
| | Power efficiency | ≥ 85% | | | | |
| | Power factor | >0.9 | | | | |
| Dimmable | Optional | | | | | |
| Other characteristic | Surface temperature | 45°C (environment temperature 31°C) | | | Structure |  |
| | Operating temperature | -35°C -- +55°C | | | | |
| | Installing method | Insert and screw | | | | |
| | Work humidity | 5%-95%RH | | | | |
| | Storage temperature | -40°C -- +65°C | | | | |
| | Equivalent halogen bulb | 20W | | | | |
| | IP rate | IP64 | | | | |
| | LED lifespan | >40000h | | | | |
| | Casing material | AL | | | | |
| | Weight | 230g | | | | |
| | Size | Φ 30*588mm | | | | |
| | Socket | G13 Rotary lamp 180° | | | | |
| | Box size | 1pcs/box 36×36×620mm | | | | |
| Carton size | 25pcs/carton 630×230×220mm | | | | | |