
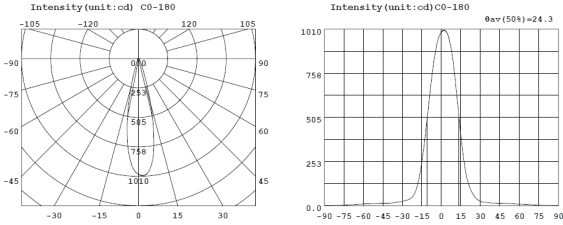
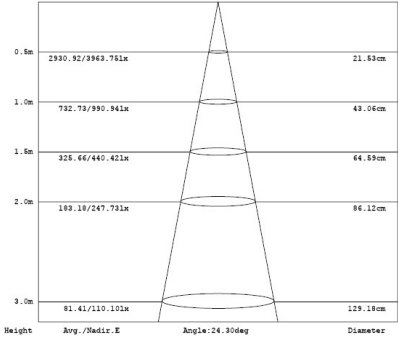
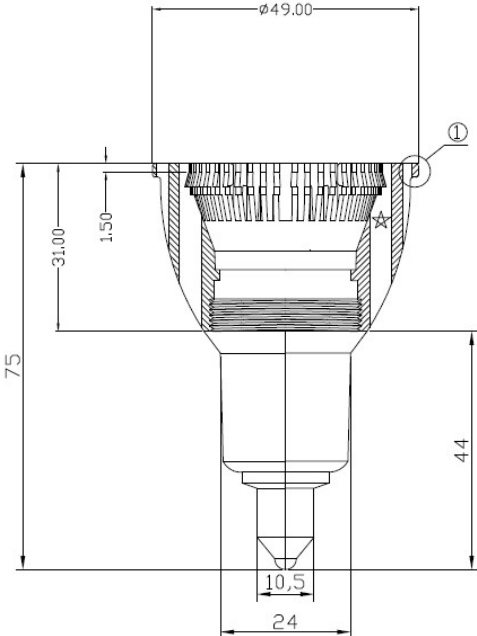


# Specification

<b>Product Name</b>		<b>LED Spotlight</b>	<b>Image</b>	
<b>Model No.</b>		<b>BM-3LED-AH</b>		
<b>Optical characteristic</b>	LED source	Bridgelux	<b>Photometric data</b>	
	LED type	1W High power		
	CCT	6000-6500K		
	LED quantity	3PCS		
	Cover Type	PMMA		
	Luminous efficiency	90LM/W		
	Luminous Flux	>270LM		
	CRI	Ra ≥ 75		
Beam angle	30° 60°			
<b>Electricity characteristic</b>	Input voltage/Current	AC85V-277V/ 0.018A-0.060A	<b>LUX</b>	
	Frequency	50-60Hz		
	Output voltage	9-12V		
	Output current	300ma ± 3%		
	Power	3.6W		
	LED Power	3W		
	Power efficiency	≥ 85%		
	Power factor	>0.7		
Dimmable	Optional			
<b>Other characteristic</b>	Surface temperature	55℃ (environment temperature 31℃)	<b>Structure</b>	
	Operating temperature	-35℃ -- +55℃		
	Installing method	Screw		
	Work humidity	5%-95%RH		
	Storage temperature	-40℃ -- +65℃		
	Equivalent Incandescent lamp	25W		
	IP rate	IP64		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	50g		
	Size	Φ 50*75mm		
	Socket	E11 E12 E14 E17 E26 E27		
	Box size	1pcs/box 60×60×85mm		
Carton size	100pcs/carton 330×330×320mm			