
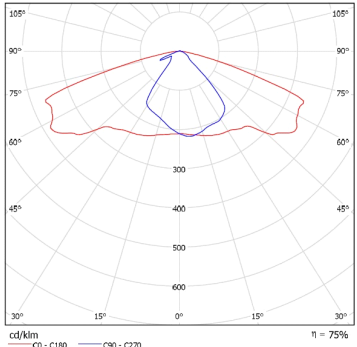
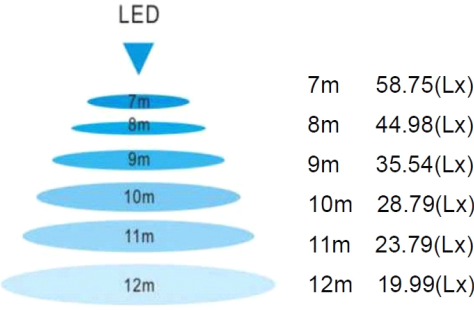


Specification

Product Name		LED Flood Light		Image	
Model No.		BM-SL100B-110W			
Optical characteristic	LED source	Bridgelux		Photometric data	
	LED type	50W Integrated light source			
	CCT	2700-6500K			
	LED quantity	2PCS			
	Cover Type	Glass			
	Luminous efficiency	90LM/W			
	Luminous Flux	9000LM			
	CRI	Ra ≥ 75			
	Beam angle	60°			
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.35A-1.07A		LUX	
	Frequency	50-60Hz			
	Output voltage	28-36v			
	Output current	2.4A ± 3%			
	Power	110W			
	LED Power	100W			
	Power efficiency	≥ 85%			
	Power factor	>0.95			
	Dimmable	NO			
Other characteristic	Surface temperature	55°C (environment temperature 31°C)		Structure	
	Operating temperature	-35°C -- +55°C			
	Installing method	Screw fixation			
	Work humidity	5%-95%RH			
	Storage temperature	-40°C -- +65°C			
	Equivalent halogen bulb	200W			
	IP rate	IP65			
	LED lifespan	>40000h			
	Casing material	AL			
	Weight	9kg			
	Size	L820*W360*H160 mm			
	Pole Height	8-10M			
	Pole Spacing	20-30M			
Box size	1pcs/box 830×370×170mm				