
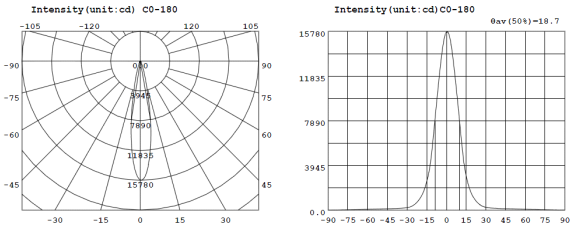
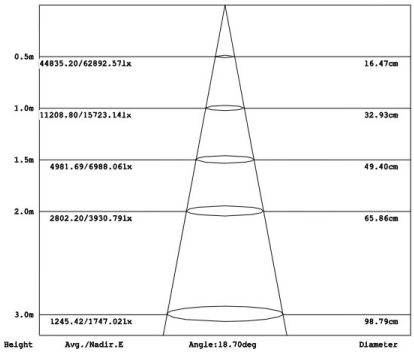
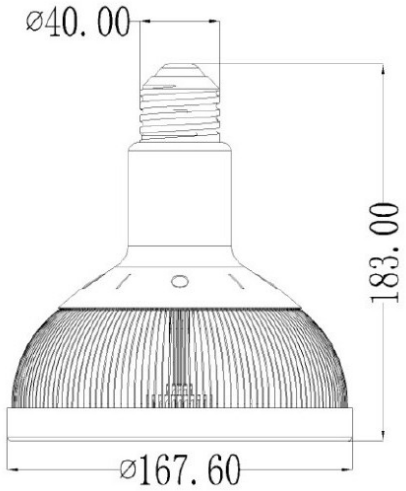


Specification

Product Name		LED Spotlight	Image	
Model No.		BM-36LEDP56-40W		
Optical characteristic	LED source	Bridgelux	Photometric data	
	LED type	1W High power		
	CCT	6000-6500K		
	LED quantity	36PCS		
	Cover Type	PMMA		
	Luminous efficiency	90LM/W		
	Luminous Flux	>3450LM		
	CRI	Ra ≥ 75		
Beam angle	30° 60°			
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.168A-0.495A	LUX	
	Frequency	50-60Hz		
	Output voltage	36-42V		
	Output current	900ma ± 3%		
	Power	42W		
	LED Power	36W		
	Power efficiency	≥ 85%		
	Power factor	>0.9		
Dimmable	Optional			
Other characteristic	Surface temperature	55℃ (environment temperature 31℃)	Structure	
	Operating temperature	-35℃ -- +55℃		
	Installing method	Screw		
	Work humidity	5%-95%RH		
	Storage temperature	-40℃ -- +65℃		
	Equivalent Incandescent lamp	400W		
	IP rate	IP65		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	1100g		
	Size	Φ 168*183mm		
	Socket	E39 E40		
Box size	1pcs/box 175×175×190mm			
Carton size	8pcs/carton 260×260×390mm			