
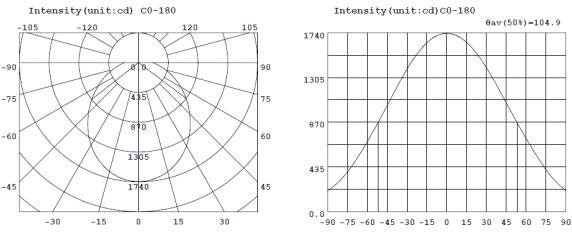
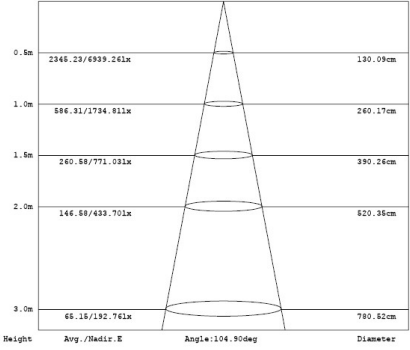



Specification

Product Name		LED Street Light	Image	
Model No.		BM-SL48A-56W		
Optical characteristic	LED source	Bridgelux	Photometric data	
	LED type	1W High Power		
	CCT	2700-6500K		
	LED quantity	48PCS		
	Cover Type	Glass		
	Luminous efficiency	90LM/W		
	Luminous Flux	4500LM		
	CRI	Ra ≥ 75		
	Beam angle	160°		
Electricity characteristic	Input voltage/Current	AC85V-277V/ 0.180A-0.507A	LUX	
	Frequency	50-60Hz		
	Output voltage	18-24v		
	Output current	2.4A ± 3%		
	Power	56W		
	LED Power	48W		
	Power efficiency	≥ 85%		
	Power factor	>0.95		
	Dimmable	NO		
Other characteristic	Surface temperature	55°C (environment temperature 31°C)	Structure	
	Operating temperature	-35°C -- +55°C		
	Installing method	Screw fixation		
	Work humidity	5%-95%RH		
	Storage temperature	-40°C -- +65°C		
	Equivalent halogen bulb	100W		
	IP rate	IP65		
	LED lifespan	>40000h		
	Casing material	AL		
	Weight	7kg		
	Size	L380*380*85 mm		
	Pole Height	6-8M		
	Pole Spacing	20-25M		
Box size	1pcs/box 400×390×95mm			